



MINI-Trim



**CE IP20**  
 NW: 0.6Kg  
 0° ~ 20° Tilt  
 0° ~ 20° Tilt  
 155 85  
 5 ~ 25mm  
 145 x 72mm

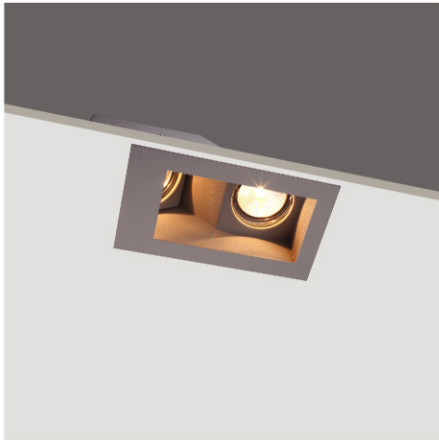

- R4A0150** AW
- R4A0150** AS
- R4A0150** WH

- Max.2 x 50W / GU10 / 230V~50Hz
- Max.2 x 50W / GU10 / 230V~50Hz
- Max.2 x 50W / GU10 / 230V~50Hz



Height	illuminance	Diameter
1 m	592 lx	0.65 m
2 m	148 lx	1.30 m
3 m	66 lx	1.95 m
4 m	37 lx	2.60 m
5 m	24 lx	3.25 m



- 7W / 25° / 2700K / 1050cd / CRI: 80 / 40000hrs / GU10
- 7W / 40° / 2700K / 450cd / CRI: 80 / 40000hrs / GU10

- 7W / 25° / 3000K / 1200cd / CRI: 60 / 40000hrs / GU10
- 7W / 40° / 3000K / 500cd / CRI: 80 / 40000hrs / GU10

- 7W / 25° / 4000K / 1200cd / CRI: 80 / 40000hrs / GU10
- 7W / 40° / 4000K / 500cd / CRI: 80 / 40000hrs / GU10



Height	illuminance	Diameter
1 m	1038 lx	0.46 m
2 m	260 lx	0.92 m
3 m	115 lx	1.39 m
4 m	65 lx	1.85 m
5 m	42 lx	2.31 m



Height	illuminance	Diameter
1 m	447 lx	0.73 m
2 m	112 lx	1.46 m
3 m	50 lx	2.18 m
4 m	28 lx	2.91 m
5 m	18 lx	3.64 m

