



Focus-S



QR-CB51 (PHILIPS)

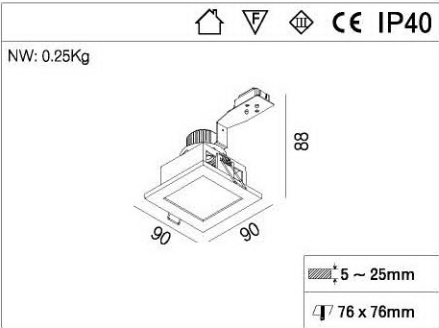

LED QR-CB51 (PHILIPS)



The main body are made of aluminium alloy or stainless steel and molded through die-casting.
There are several finishing available, such as texture white, matt white, texture silver, nickel brush.
A specular aluminium reflector is provided. The fully frosted glass helps to achieve the effect of anti-fog and anti-UV.
QR-CB51 or LED QR-CB51 light source is used, electric appliances are installed externally.

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.;
This product is CE certified and all materials are in conformity with RoHS standard.

R4B0122 BB

Max.50W / excl. Electronic Transformer / GU5.3 / AC12V



60°	1 m	13086 lx	0.17 m
	2 m	3272 lx	0.35 m
	3 m	1457 lx	0.52 m
30°	4 m	818 lx	0.70 m
	5 m	523 lx	0.87 m
18000cd High Illuminance Diameter			



60°	1 m	4389 lx	0.43 m
	2 m	1097 lx	0.85 m
	3 m	488 lx	1.23 m
30°	4 m	275 lx	1.55 m
	5 m	176 lx	1.89 m
4400cd High Illuminance Diameter			



60°	1 m	2199 lx	0.65 m
	2 m	550 lx	1.30 m
	3 m	244 lx	2.02 m
30°	4 m	137 lx	2.57 m
	5 m	88 lx	3.31 m
2200cd High Illuminance Diameter			



7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3

7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3

7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3

7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3

60°	1 m	1531 lx	0.42 m
	2 m	383 lx	0.86 m
	3 m	170 lx	1.30 m
30°	4 m	96 lx	1.72 m
	5 m	61 lx	2.15 m
1550cd High Illuminance Diameter			

