



Recessed down lights - Giro

Giro




The inner ring and outer ring are made of pure aluminum and shaped by extrusion; the base plate and the bracket are made of hard iron; the surface is treated by dusting;

Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different combinations; a fibre box is optional;

QR-CB51 or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.

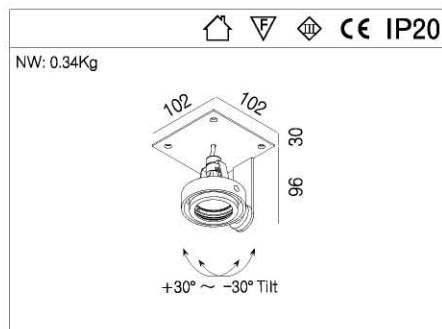

QR-CB51 (PHILIPS)

R4B0013 AW

R4B0013 AS

Max.50W / excl. Electronic Transformer / GU5.3 / AC12V

Max.50W / excl. Electronic Transformer / GU5.3 / AC12V



Height	1 m	2 m	3 m	4 m	5 m
60°	13086 lx	3272 lx	1457 lx	818 lx	523 lx
30°	19000cd				
High					
	13086 lx	3272 lx	1457 lx	818 lx	523 lx
	0.17 m	0.35 m	0.52 m	0.70 m	0.87 m
	High				
	13086 lx	3272 lx	1457 lx	818 lx	523 lx
	0.17 m	0.35 m	0.52 m	0.70 m	0.87 m



Height	1 m	2 m	3 m	4 m	5 m
60°	4389 lx	1097 lx	488 lx	275 lx	176 lx
30°	4400cd				
High					
	4389 lx	1097 lx	488 lx	275 lx	176 lx
	0.43 m	0.85 m	1.23 m	1.55 m	1.89 m
	High				
	4389 lx	1097 lx	488 lx	275 lx	176 lx
	0.43 m	0.85 m	1.23 m	1.55 m	1.89 m



Height	1 m	2 m	3 m	4 m	5 m
60°	2199 lx	550 lx	244 lx	137 lx	88 lx
30°	2200cd				
High					
	2199 lx	550 lx	244 lx	137 lx	88 lx
	0.65 m	1.30 m	2.02 m	2.57 m	3.31 m
	High				
	2199 lx	550 lx	244 lx	137 lx	88 lx
	0.65 m	1.30 m	2.02 m	2.57 m	3.31 m



LED QR-CB51 (PHILIPS)

7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3

7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3

7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3

7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



Height	1 m	2 m	3 m	4 m	5 m
60°	1531 lx	383 lx	170 lx	96 lx	61 lx
30°	1550cd				
High					
	1531 lx	383 lx	170 lx	96 lx	61 lx
	0.42 m	0.86 m	1.30 m	1.72 m	2.15 m
	High				
	1531 lx	383 lx	170 lx	96 lx	61 lx
	0.42 m	0.86 m	1.30 m	1.72 m	2.15 m



Accessories: Giro recessed box

For model:
R4B0013 AW
R4B0013 AS

AB0009

