
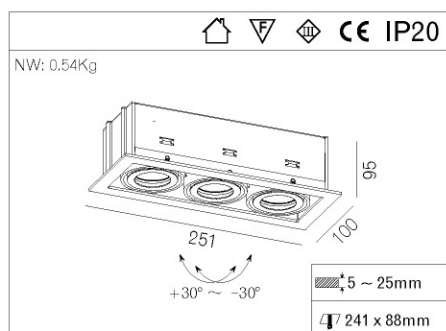


Alu-Box




QR-CB51(PHILIPS)

R4B0024 BV


Max.3 x 50W / excl. Electronic Transformer / GU5.3 / AC12V




Height	1 m	2 m	3 m	4 m	5 m
Illuminance	13086 lx	3272 lx	1457 lx	818 lx	523 lx
Diameter	0.17 m	0.35 m	0.52 m	0.70 m	0.87 m



Height	1 m	2 m	3 m	4 m	5 m
Illuminance	4389 lx	1097 lx	488 lx	275 lx	176 lx
Diameter	0.43 m	0.85 m	1.23 m	1.55 m	1.89 m



Height	1 m	2 m	3 m	4 m	5 m
Illuminance	2199 lx	550 lx	244 lx	137 lx	88 lx
Diameter	0.65 m	1.30 m	2.02 m	2.57 m	3.31 m



LED QR-CB51(PHILIPS)

7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3

7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3

7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3

7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



Height	1 m	2 m	3 m	4 m	5 m
Illuminance	1531 lx	383 lx	170 lx	96 lx	61 lx
Diameter	0.42 m	0.86 m	1.30 m	1.72 m	2.15 m

