
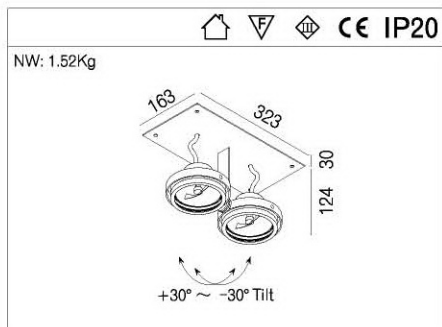


Giro



R4B0017 AW
R4B0017 AS

Max.2 x 75W / excl.Electronic Transformer / G53 / AC12V

Max.2 x 75W / excl.Electronic Transformer / G53 / AC12V



Height	1 m	2 m	3 m	4 m	5 m
60°	29978 lx	7245 lx	3220 lx	1811 lx	1159 lx
30°	29000cd				
High	Illuminance	Diameter			



Height	1 m	2 m	3 m	4 m	5 m
60°	5147 lx	1287 lx	572 lx	322 lx	206 lx
30°	5150cd				
High	Illuminance	Diameter			



Height	1 m	2 m	3 m	4 m	5 m
60°	1889 lx	472 lx	210 lx	118 lx	76 lx
30°	1900cd				
High	Illuminance	Diameter			



Max.2 x 100W / excl.Electronic Transformer / G53 / AC12V

Max.2 x 100W / excl.Electronic Transformer / G53 / AC12V



Height	1 m	2 m	3 m	4 m	5 m
60°	45127 lx	11282 lx	5014 lx	2820 lx	1805 lx
30°	47000cd				
High	Illuminance	Diameter			



Height	1 m	2 m	3 m	4 m	5 m
60°	8332 lx	2083 lx	926 lx	521 lx	333 lx
30°	8600cd				
High	Illuminance	Diameter			



Height	1 m	2 m	3 m	4 m	5 m
60°	2668 lx	667 lx	296 lx	167 lx	107 lx
30°	2750cd				
High	Illuminance	Diameter			



Accessories: Giro recessed box

For model:
R4B0017 AW
R4B0017 AS

AB0013

