

LED(CREE)

NW: 0.46Kg

58

255

248

±5 ~ 25mm

248*35mm

370

610

245

20pcs

GW: 10.28Kg

R3B0681

IP20




The light body is made of aluminum alloy and mold through die-casting. Have super low power consumption, high efficiency and energy saving features; excellent lighting performance and lighting quality. Secondary Optics use high quality Finland LEDiL optical lens and special designed black optical grating. This product uses the ultra narrow edge design with small size, can be better to dissolve into building space, achieve a perfect combination. Suitable for use in areas like hotel, villas, shopping mall etc. The Product is in compliance with CE and RoHs directives.

AW 21W LED 2700K-3000K / excl. 700mA LED Driver / 30V

1 m	240 lx	1.11 m
2 m	60 lx	2.22 m
3 m	27 lx	3.33 m
4 m	15 lx	4.44 m
5 m	10 lx	5.55 m

High Illuminance Diameter

FLEXIBLE

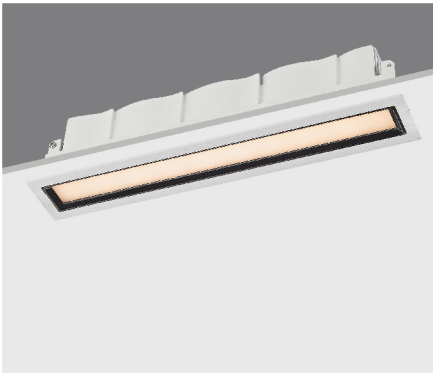

LED(CREE)

NW: 0.43Kg

58

255

248

±5 ~ 25mm

248*35mm

370

610

245

20pcs

GW: 11.1Kg

R3B0682

IP20

The light body is made of aluminum alloy and mold through die-casting. Have super low power consumption, high efficiency and energy saving features; excellent lighting performance and lighting quality. Secondary Optics use high quality Finland LEDiL optical lens and special designed black optical grating. This product uses the ultra narrow edge design with small size, can be better to dissolve into building space, achieve a perfect combination. Suitable for use in areas like hotel, villas, shopping mall etc. The Product is in compliance with CE and RoHs directives.

AW 21W LED 2700K-3000K / excl. 700mA LED Driver / 30V

1 m	231 lx	2.5 m
2 m	58 lx	5.01 m
3 m	26 lx	7.51 m
4 m	14 lx	10.01 m
5 m	9 lx	12.51 m

High Illuminance Diameter

